


OverSized Load Sign Quick Install Instructions (Side Bar)

1. Side bar only luggage racks do not have the cross bars that run from the driver's side to the passenger side of the vehicle. The OSL side bar mounting frame is designed to attach to the luggage rack side bars only.




2. Mount Pivot Plates using 3/8-16 x 2.0 inch long Stainless Steel bolts and 3/8-16 nuts supplied. Use 2 bolts for each pivot plate. The pivot plates mount on the inside of the frame tube with the pivot bushing oriented outward as shown in the drawing below. (note: the lanyard and pin will be located to the outside as well)



(left hand and right hand brackets included)

3. Mount the side mount luggage bar brackets to one side (drivers side or passenger side) of the sign frame using 3/8-16 x 2.0 inch long Stainless Steel bolts and 3/8-16 nuts supplied. Do not tighten yet to allow for adjustment.

Side Mount Sign Frame

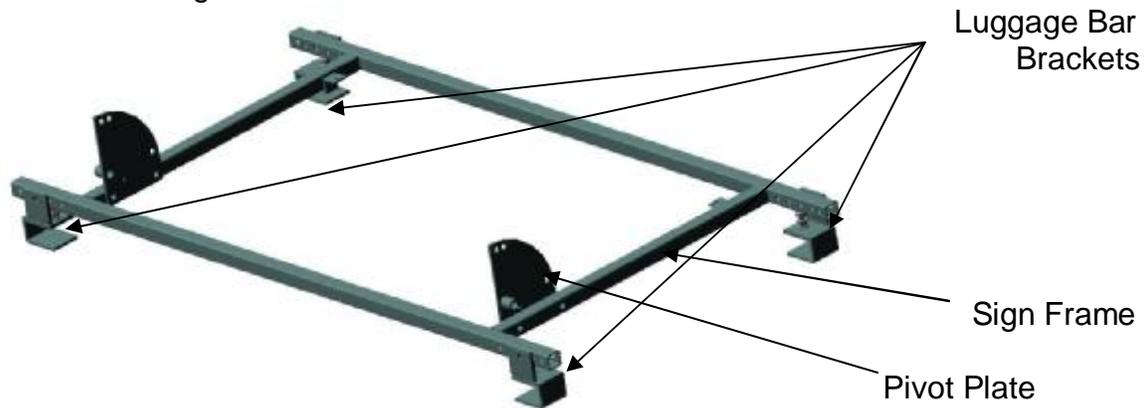

4. Mount the other side brackets using 3/8-16 x 2.0 inch bolts and 3/8-16 nuts.
5. Make sure to use the same mounting holes on each side of the frame to ensure that the sign frame is centered on the vehicle.
6. Tighten the luggage bar brackets to the side rails by adjusting the compression bolt (3/8-16 x 1.00 inch long bolt w/ 3/8-16 jam nut) to secure the luggage rack frame.
7. Mount the OSL Sign to the frame and engage the pin in the vertical, the 5 degrees off vertical or the horizontal positions.
8. Mount the optional flag holders to the bottom of the sign as shown.

